


®gt FIXE EURO Luminaire

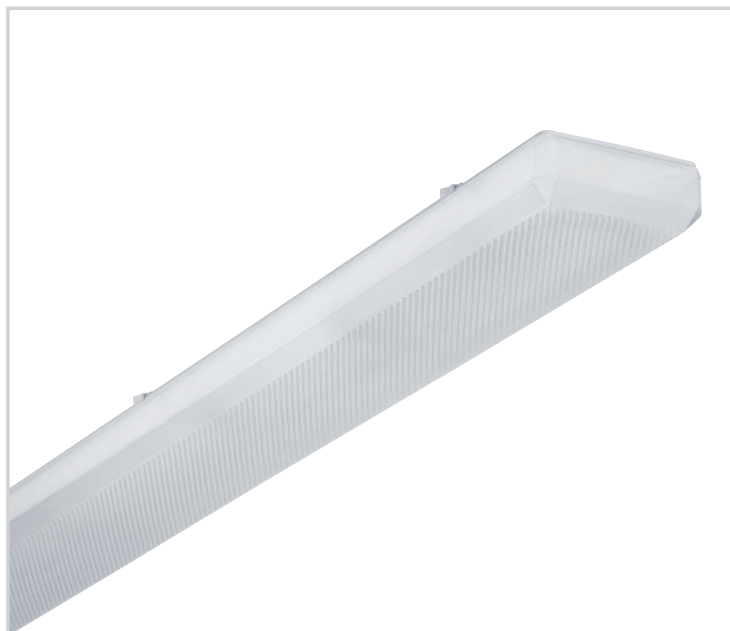

Areas of application

GLT FIXE EURO surface-mounted luminaire for 1-2 GLT TUBES:

- Industrial areas, for example production halls, warehouses, trade centers
- Parking garages, tunnels
- Public buildings, wholesale stores, logistics hubs

Product benefits

- Surface-mounted luminaire for GLT LED TUBES without ballast
- Suitabel for standard LED tubes according to EN 62776
- Mounting on wall or ceiling
- Housing made of white painted sheet steel
- The cover is an opal or prismatic tray made of acrylic glass (PMMA)
- Built-in device carrier/reflector made of white sheet steel
- Polycarbonate latch closure
- 3-pole connection terminal with plug-in contact
- Up to 80% energy savings with GLT TUBES



article-nr.	description
1700120000000043	GLT FIXE EURO-O surface-mounted luminaire for 1 x GLT TUBE 1200 mm
1700120400000044	GLT FIXE EURO-P surface-mounted luminaire for 1 x GLT TUBE 1200 mm
1700120400000043	GLT FIXE EURO-O surface-mounted luminaire for 2 x GLT TUBE 1200 mm
1700120400000042	GLT FIXE EURO-P surface-mounted luminaire for 2 x GLT TUBE 1200 mm
1700150400000033	GLT FIXE EURO-O surface-mounted luminaire for 1 x GLT TUBE 1500 mm
1700150400000035	GLT FIXE EURO-P surface-mounted luminaire for 1 x GLT TUBE 1500 mm
1700150400000034	GLT FIXE EURO-O surface-mounted luminaire for 2 x GLT TUBE 1500 mm
1700150400000043	GLT FIXE EURO-P surface mounted luminaire for 2 x GLT TUBE 1500 mm



Product data | GLT FIXE EURO surface-mounted luminaire

Certificates:	CE, Made in Germany	
Protection class:	SK I	
IP protection class:	IP 50	
IK protection class:	IK02	
Flammability (UL94):	HB	
Glow wire resistance:	PMMA 650°C	
Energy efficiency class:	A-B with GLT TUBE	
Warranty:	5 years	
Socket/base:	G13/T8	
Cover:	cover made of opal acrylic glass (PMMA)	
Housing:	housing made of white painted sheet steel	
Net weight:	1 x GLT TUBE 1200 mm:	1,9 kg
	2 x GLT TUBE 1200 mm:	2,6 kg
	1 x GLT TUBE 1500 mm:	1,9 kg
	2 x GLT TUBE 1500 mm:	2,6 kg
Dimensions (L x B x H):	1 x GLT TUBE 1200 mm:	1270 x 105 x 90 mm
	2 x GLT TUBE 1200 mm:	1270 x 190 x 90 mm
	1 x GLT TUBE 1500 mm:	1570 x 105 x 90 mm
	2 x GLT TUBE 1500 mm:	1570 x 190 x 90 mm

Electrical data

Consumption (with GLT TUBE):	1 x GLT TUBE 1200 mm:	1 x 14 W
	2 x GLT TUBE 1200 mm:	2 x 14 W
	1 x GLT TUBE 1500 mm:	1 x 17 W
	1 x GLT TUBE 1500 mm:	2 x 17 W
Input voltage:	230 Volt	
Operating frequency:	50 - 60 Hz	
Lifetime:	>30 years	

Mounting	Mounting on wall or ceiling. Secure and stable hold of the tray/cover thanks to internal locking technology. Latch lock made of white polycarbonate (PC). 3-pole connection terminal with plug-in contact, loop-through possible. 2 cable entries. Approved for indoor use.
----------	---

The luminaire complies with the basic requirements of the applicable EU directives and product safety law and carries the CE mark. Please consult your consultant if the luminaire is to be used in chemically polluted environments, under increased ambient temperatures or high or condensing humidity.